
SPECIFICATION FOR PARTIAL GRAVEL ROAD CONSTRUCTION WORKS

The following is intended as a general guide for the construction of gravel road pavements within the Shire of Cardinia.

1. Typical Cross section

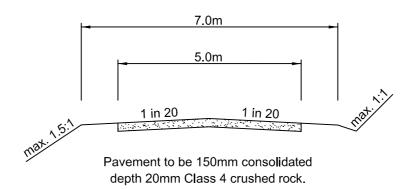

- Clearing to be as directed but should allow a minimum cleared width of 1.0 metre outside the batter lines.
- 3. The centre line of the proposed road should coincide with the centre line of the existing road reserve unless otherwise directed.
- 4. Drainage culverts to be installed as directed, complete with concrete endwalls and catch pits.
- 5. Guide posts to be erected at culvert ends and other locations as directed.
- 6. All debris from the construction works to be burnt or removed from the area and the road reserve left in a neat and tidy condition.
- 7. Road or street name sign to be erected to Council standard.
- 8. Council's Representative to be notified three (3) days prior to work commencing on site.
- 9. Drainage easements required for construction works to be shown on a plan of works to be carried out.
- 10. Planning permit required for any tree removal.

REVISIONS	F		7
	Е		1 //
	D		(u/)
	С		1/20-
	В		
	Α		MANAGER ASSETS & DEVELOPMENT
	١	OT TO SCALE	NOVEMBER 2003

CARDINIA SHIRE COUNCIL

GRAVEL ROAD PARTIAL CONSTRUCTION