


TEMPORARY ALIGNMENT


DURING SUBDIVISION CONSTRUCTION CONTRACTORS TO INSTALL OPENING 500mm ABOVE FINISHED SURFACE LEVEL. WHEN HOUSE DRAIN CONNECTED, GRATED ENTRY MUST BE LOWERED TO 50mm BELOW FINISHED SURFACE LEVEL AS SHOWN.

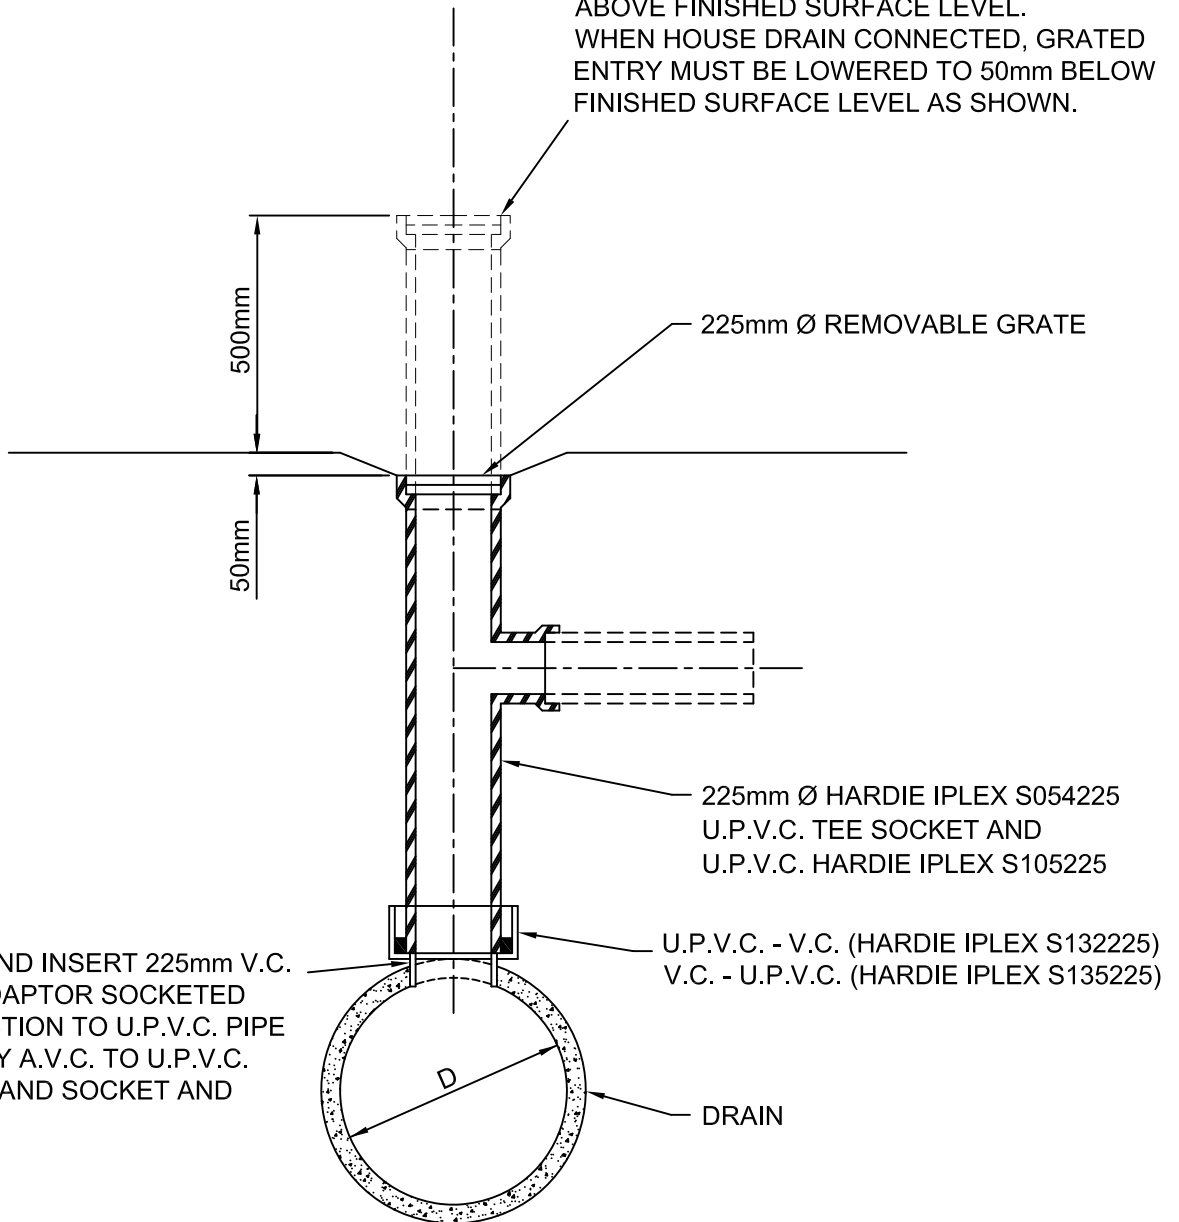

BREAK INTO AND INSERT 225mm V.C. TO U.P.V.C. ADAPTOR SOCKETED WITH CONNECTION TO U.P.V.C. PIPE BEING MADE BY A.V.C. TO U.P.V.C. BUSH SPIGOT AND SOCKET AND RUBBER RING.

NOTES:

1. ALL DIMENSIONS ARE IN MILLIMETRES UNLESS OTHERWISE SHOWN.
2. ALL PIPES AND FITTINGS MUST BE U.P.V.C. SEWER QUALITY.
3. ALL WORKS MUST BE CARRIED OUT AND SITE REINSTATED TO THE SATISFACTION OF THE SUPERVISING OFFICER.
4. THE SITE SHALL BE MAINTAINED SAFE AT ALL TIMES IN ACCORDANCE WITH AS17423.

REVISIONS		 SHIRE COUNCIL	STANDARD DRAWING		APPROVED:
D			INDUSTRIAL SITE STORMWATER CONNECTION		<i>[Signature]</i>
C					MANAGER ASSETS & DEVELOPMENT
B					ISSUED: OCTOBER 2008
A	20/10/08 New title block, removed concrete inlet pad, temporary alignment and notes added.				DRG. NO.: CSC-305
NOT TO SCALE					