
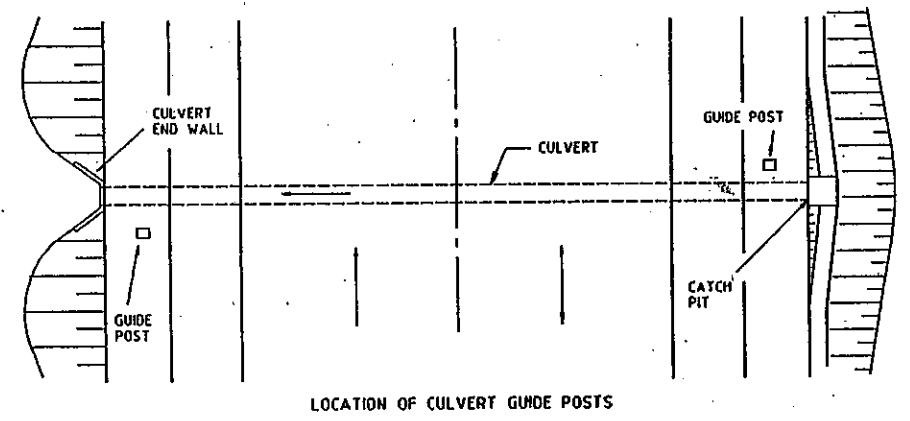
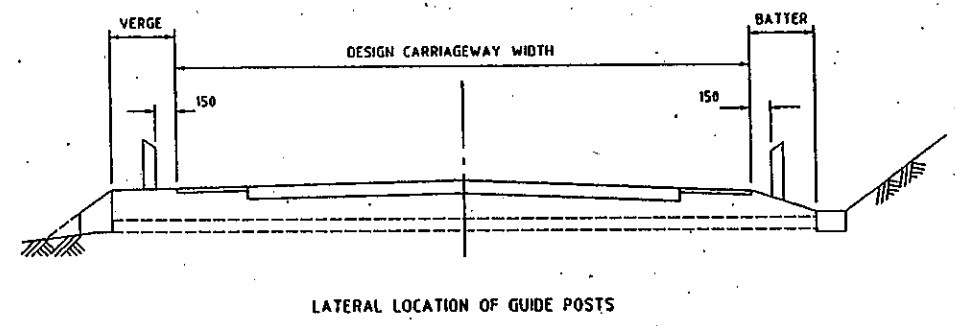


NOT TO SCALE	REVISIONS					
	F					
	E					
	D					
	C					
	A					

MANAGER TECHNICAL SERVICES
 JANUARY 2001

CARDINIA SHIRE COUNCIL

GUIDE POSTS

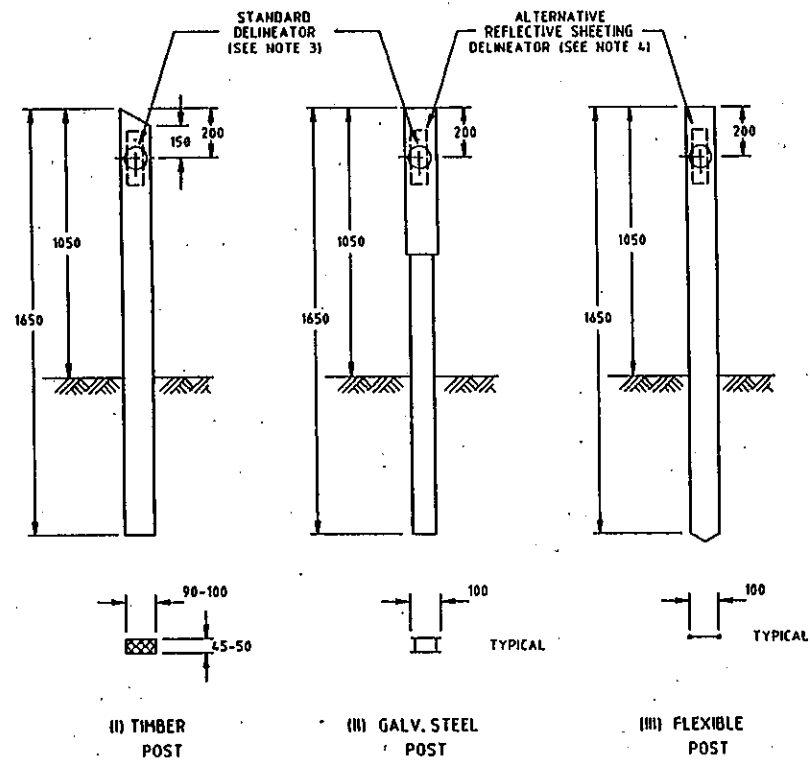

- NOTES:
- THE FOLLOWING TYPES OF GUIDE POST ARE AVAILABLE
 - (i) TIMBER POSTS: 100x50mm (nominal) CROSS-SECTION, PAINTED WHITE. SEE DIAGRAM (i).
 - (ii) GALVANIZED STEEL POSTS: OF APPROVED CROSS-SECTION WITH 100x500mm WHITE DELINEATOR PLATE ATTACHED. SEE DIAGRAM (ii).
 - (iii) FLEXIBLE POST: 100mm WIDE WHITE PLASTIC OR FIBREGLASS STRIP OF APPROVED TYPE, CAPABLE OF SELF-RECOVERY AFTER KNOCKDOWN. SEE DIAGRAM (iii).
 - FOR DETAILS OF GUIDE POST SPACING AND SPECIAL TREATMENTS AT BRIDGES AND CULVERTS, REF TRAFFIC ENGINEERING MANUALS.

- THE STANDARD DELINEATOR IS THE 80mm dia. CIRCULAR CORNER-CUBE TYPE, RED OR WHITE, CONFORMING WITH THE TYPE "A" DELINEATOR SPECIFIED IN AS 1906/1981, PART 2.
- WHERE SPECIFIED ON THE DRAWING, SHEETING TYPE DELINEATORS CAN BE USED IN PLACE OF THE STANDARD DELINEATORS. THE SHEETING SHALL HAVE A TOTAL MINIMUM REFLECTIVE OUTPUT EQUIVALENT TO 100cm² OF CLASS 1A RETROREFLECTIVE MATERIAL AS DEFINED IN AS/NZS 1906/1993 PART 1. THE WIDTH OF REFLECTIVE MATERIAL SHALL BE 40mm MINIMUM. ONLY ONE TYPE OF DELINEATOR SHALL BE USED AT ANY ONE LOCATION.